
MOTORS AND CONTROLS





GENERAL NOTES


- Installation by qualified fitter only.
- All radio installations must be installed according to local regulations.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams.
- Check space for cables and plugs!

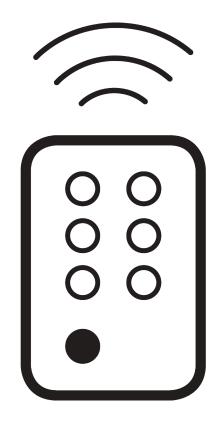

APPLICATION CHART


PAGE	SYSTEM
5	SG Control A
11	SG Control N
19	SG Control R
25	SG Smart





SG Control A



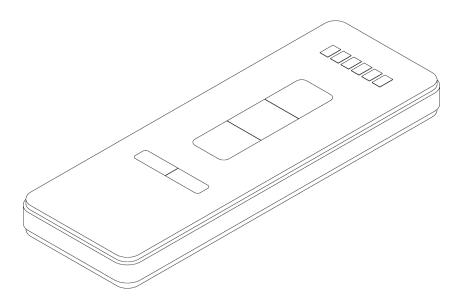

PRODUCT INFORMATION

- Radio controlled
- 1-channel, 2-channel, 5-channel or 6-channel radio controls
- Radio hand held and wall controls
- Single and multi channel timer units




APPLICATION


A. SYSTEMS


- Electric curtain track system SG 5100
- Roller blind system SG 4955
- Roman blind system SG 2345

OVERVIEW COMPONENTS

A. <u>RADIO</u> CONTROLS







SG 10946

- **Channel:** 1 channel
- Frequency: 433.92 MHz
- Colours: white

Features:

- Operates single system or operates one group of systems

SG 10947

- Channel: 2+1 channel
- Frequency: 433.92 MHz
- Colours: white

Features:

- 2 channel: operates up to two single systems individually
- 2 channel: operates up to two groups of systems individually
- 1 channel: operates all systems together

SG 10948


- Channel: 6+1 channel
- Frequency: 433.92 MHz
- Colours: white


- 6 channel: operates up to 6 single systems individually
- 6 channel: operates up to 6 groups of systems individually
- 1 channel: operates all systems together











C. RADIO TIMER UNITS



SG 10949

- Channel: 1 channel
- Frequency: 433.92 MHz
- Colours: white

Features:

- Operates single system or operates one group of systems

SG 10950

- Channel: 2 channel
- Frequency: 433.92 MHz
- Colours: white

Features:

- 2 channel: operates up to two single systems individually
- 2 channel: operates up to two groups of systems individually

SG 10951

- **Channel:** 5+1 channel
- Frequency: 433.92 MHz
- Colours: white

Features:

- 5 channel: operates up to 5 single systems individually
- 5 channel: operates up to 5 groups of systems individually
- 1 channel: operates all systems together

SG 11429

- Channel: 1 channel
- Frequency: 433.92 MHz
- Colours: white

- Operates single system
- Operates one group of systems
- LCD display
- Touch button control
- Single 'open' and 'close' time setting



SG 11093

- **Channel:** 16 channel
- Frequency: 433.92 MHz
- Colours: white

Features:


- 16 channel: operates up to 16 single systems individually
- 16 channel: operates up to 16 groups of systems individually
- LCD display
- Touch button control
- Timing function with max. 8 timing points programmable for daily and weekly cycles

D. MANUALS

Refer to Silent Gliss website.

COMBINATION CONTROLS AND SYSTEMS

A. EXAMPLE



SG 10946 SG 10947 SG 10948









Applicable with following systems:

- Electric curtain track system SG 5100
- Roller blind system SG 4955
- Roman blind system SG 2345

B. WIRING DIAGRAMS

PARTS

A. CONTROLS



SG 10946

Radio hand held 1 channel



SG 10947

Radio hand held 2+1 channel



SG 10948

SG 10949

Radio hand held 6+1 channel



Radio wall transmitter 1 channel



SG 10950

Radio wall transmitter 2 channel



Radio wall transmitter 5+1 channel



SG 11429

SG 10951

Radio timer unit 1 channel








SG Control N



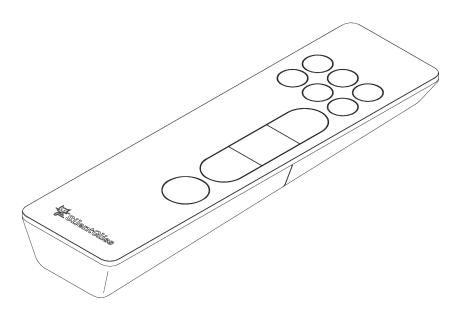

PRODUCT INFORMATION

- Radio controlled
- Bi directional
- Radio hand held controls: 1-channel or 6-channel
- Radio wall controls, 1-channel or 6-channel
- Radio receivers for motors without integrated receiver
- Silent Gliss Move App



APPLICATION

A. SYSTEMS

- Dim-out blind system SG 4760
- Dim-out blind system SG 4770
- Dim-out blind system SG 4780
- Electric curtain track system SG 5600
- Electric curtain track system SG 5800
- Panel Glide System SG 2750
- Roller blind system SG 4955
- Roller blind system SG 4960
- Roller blind system SG 4970
- Roller blind system SG 4980
- Roller blind system SG 4985
- Roman blind system SG 2355
- Roman blind system SG 2360
- Skylight shading system SG 2195
- Skylight shading system SG 8600
- Skylight shading system SG 8640
- Venetian blind system SG 8250
- Venetian blind system SG 8960
- Vertical blind system SG 2960

OVERVIEW COMPONENTS

A. <u>RADIO</u> CONTROLS





SG 11931

- Channel: 1 channel
- Frequency: 433 MHz
- Colours: white, black

Features:

- Operates single system or operates one group up to 5 systems
- Wall holder in corresponding colour


SG 11932

- Channel: 6 channel
- Frequency: 433 MHz
- Colours: white, black

- 6 channel: operates up to 6 single systems individually
- 6 channel: operates up to 6 groups of up to 5 systems individually
- Several channels can be operated simultaneously
- Saves the selection of channels
- Wall holder in corresponding colour










C. MOVE BY SILENT GLISS



D. <u>RADIO</u> RECEIVERS



SG 11936

- Channel: 1 channel
- Frequency: 433 MHz
- Colours: white

Features:

- Operates single system or operates one group of up to 5 systems

SG 11937

- Channel: 6 channel
- Frequency: 433 MHz
- Colours: white

Features:

- 6 channel: operates up to 6 single systems individually
- 6 channel: operates up to 6 groups of up to 5 systems individually
- Several channels can be operated simultaneously
- Saves the selection of channels

SG 11900

- Frequency: 433, 868 MHz
- Colours: black

Features:

- Operates up to 40 single systems individually
- App available for Android and IOS
- Various languages
- Programmable day and week, sunrise and sunset time
- Holiday mode
- Customised automation

SG 11938


- Channel: 1 channel
- Frequency: 433 MHz
- **Voltage:** 100-240 V / 50/60 Hz

- Operates single system
- Flush mounting





E. RELAY



F. MANUALS

Refer to Silent Gliss website.

SG 11939

- **Channel:** 1 channel
- Frequency: 433 MHz

Features:

- Only applicable with motor SG 9060 (electric curtain track system SG 5600)

SG 11946

- **Voltage:** 240 V / 50 Hz

Features:


- Potential separation



COMBINATION CONTROLS / RECEIVERS AND SYSTEMS

A. EXAMPLES


Motors with integrated receiver

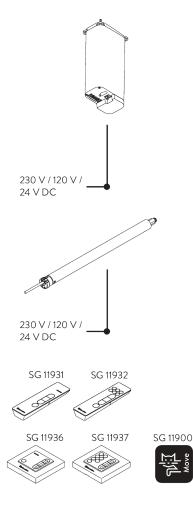


Applicable with following systems:

- Dim-out blind system SG 4760
- Dim-out blind system SG 4770
- Dim-out blind system SG 4780
- Electric curtain track system SG 5600
- Panel glide system SG 2750
- Roller blind system SG 4955
- Roller blind system SG 4960
- Roller blind system SG 4970
- Roller blind system SG 4980
- Roller blind system SG 4985
- Roman blind system SG 2355
- Roman blind system SG 2360
- Vertical blind system SG 2960
- Venetian blind system SG 8960 (230 V)





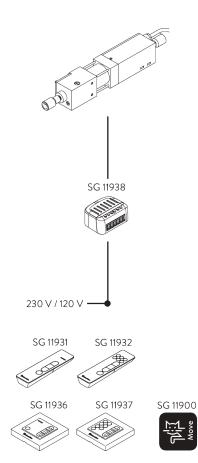



Applicable with following systems:

- Electric curtain track system SG 5800
- Skylight shading system SG 2195
- Skylight shading system SG 8600
- Skylight shading system SG 8640

Applicable with following systems:

- Venetian blind system SG 8250

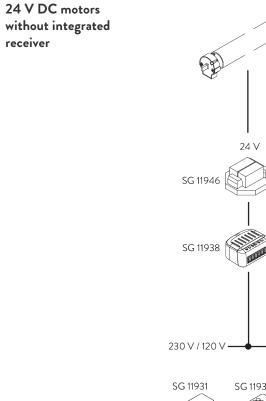





24 V 🔬

230 V

B. WIRING DIAGRAMS

4

PARTS

A. CONTROLS / RECEIVERS



SG 11900

Move Server




SG 11931 Radio hand held 1 channel

Radio hand held 6 channel

∕@





SG 11932



SG 11937

Radio wall transmitter 6 channel



>

SG 11938 Radio receiver BiDi Shutter

SG 11939 Radio modul control N



SG 11946

Relay








SG Control R



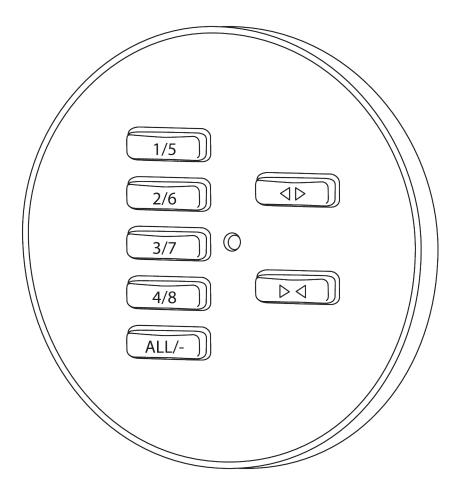

PRODUCT INFORMATION

- Radio controlled
- Single-channel and 8-channel radio controls
- Radio hand-held and wall mounted controls
- Radio receivers for motors without integrated receiver
- Wall switch finishes mirror polish steel, stainless steel, brass



APPLICATION

A. SYSTEMS

- Dim-out blind system SG 4760
- Dim-out blind system SG 4770
- Dim-out blind system SG 4780
- Electric curtain track system SG 5600
- Electric curtain track system SG 5800
- Pleated blind system SG 8500
- Roller blinds system SG 4960
- Roller blinds system SG 4970
- Roller blinds system SG 4880
- Roman blind system SG 2350
- Skylight shading system SG 2195
- Skylight shading system SG 8640
- Skylight shading system SG 8600
- Venetian blind system SG 8250
- Venetian blind system SG 8960
- Vertical blind system SG 2950

OVERVIEW COMPONENTS

A. RADIO WALL CONTROLS



SG 20913 - Channel: 1 channel

- Frequency: 433.9 MHz
- Colours: Mirror polish steel, brushed stainless steel, brass

Features:

- Operates single system or one group of systems
- Requires installation into an existing recessed back box (min. depth 16 mm)


SG 20914

- Channel: 8 channel
- Frequency: 433.9 MHz
- Colours: Mirror polish, brushed stainless, brass


- 8 channel: operates up to 8 systems individually
- 8 channel: operates up to 8 groups of systems individually
- 1 channel operates all systems together
- Requires installation into an existing recessed back box (min. depth 16 mm)




B. RADIO CONTROLS



C. RADIO RECEIVERS





SG 20336

- Channel: 8 channel
- Frequency: 433.9 MHz
- Colours: Mirror polish steel, Brushed stainless steel, brass

Features:

- 8 channel: operates up to 8 systems individually
- 8 channel: operates up to 8 groups of systems individually
- 1 channel operates all systems together

SG 20907

- **Channel:** 1 channel
- Frequency: 433.9 MHz
- Voltage Input: 24 V
- Volt output : 24 V

Features:

- Operates 24V single system
- For motors without integrated receiver

SG 20919


- Channel: 1 channel
- Frequency: 433.9 MHz
- Voltage input: 230 V
- Voltage output: 230V

Features:

- Operates 230 V single system
- For motors without integrated receiver

D. MANUALS

COMBINATION CONTROLS / RECEIVERS AND SYSTEMS

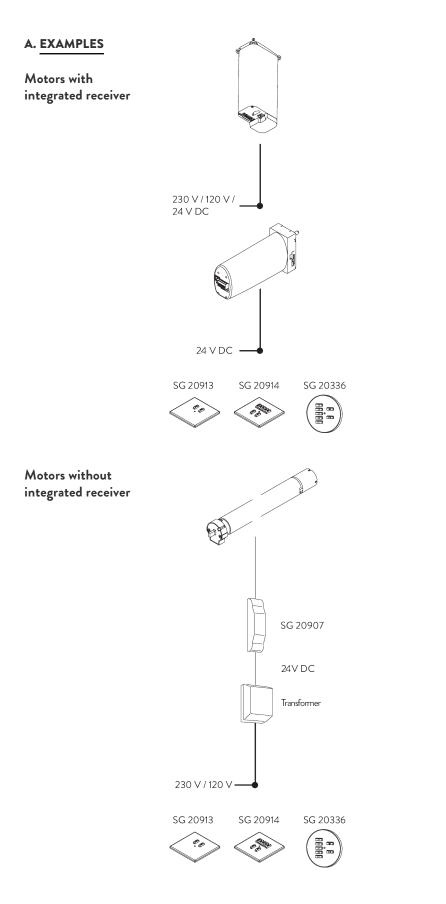


Applicable with the following systems:

- Electric curtain track system SG 5600
- Vertical blind system SG 2950

Applicable with the following systems:

- Pleated blind system SG 8500
- Venetian blind system SG 8250



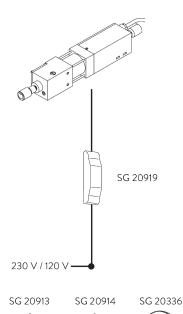

e god

e,

8.8

Applicable with the following systems:

- Dim-out blind system SG 4760
- Dim-out blind system SG 4770
- Dim-out blind system SG 4780
- Electric curtain track system SG 5800
- Roller blinds system SG 4960
- Roller blinds system SG 4970
- Roller blinds system SG 4880
- Roman blind system SG 2350
- Skylight shading system SG 2195
- Skylight shading system SG 8640
- Skylight shading system SG 8600

B. <u>WIRING</u> DIAGRAMS



PARTS

A. CONTROLS / RECEIVERS



SG 11411

Radio module type R



SG 20336

Hand held transmitter 8 channel







SG 20913

Wall switch single channel



SG 20914

Wall switch 8 channel



SG 20917 Pattress box


SG 20919 Control module motor type R





SG Smart



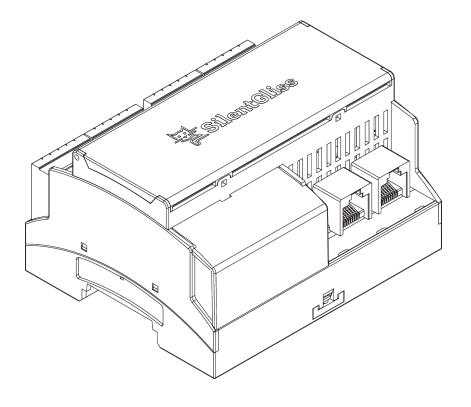

PRODUCT INFORMATION

- Two way communication between motors and control system
- Works in conjunction with specific third party control systems
- Precise motor control
- Wide range of Silent Gliss product types



APPLICATION


A. SYSTEMS


- Dim-out blind system SG 4760
- Dim-out blind system SG 4770
- Dim-out blind system SG 4780
- Electric curtain track system SG 5600
- Roller blind system SG 4960
- Roller blind system SG 4970
- Roller blind system SG 4880
- Roman blind system SG 2350


Panel glide system SG 2750

OVERVIEW COMPONENTS

A. <u>SMART</u> COMPONENTS







SG 11260 Gateway Cedia

– Din rail mounted

Features:

- Controls up to 8 motors
- Up to 64 motors when combined with Expansion Units SG 11262
- Key communication link with primary control system
- Plug in connector blocks

SG 11261 Gateway KNX

– Din rail mounted

Features:


- For use with KNX based control systems
- Key communication link with primary control systems
- Controls up to 8 motors
- Up to 64 motors when combined with expansion units SG 11262
- Plug in connector blocks

SG 11262 Expansion Unit


- Din Rail mounted
- Used in conjunction with Gateways


- Controls up to 8 motors
- Plug in connector blocks






B. POWER SUPPLIES









SG 11270 Smart Module

- Smart Module for SG 5600 system
- Works exclusively with Smart Gateway components

Features:

- Simple "plug in" module for SG 9060 motors
- Screw connector blocks

SG 11263 Power Supply

- 24 V DC 2.5 A output
- Din rail mounted

Features:

- Powers Gateway components SG 11260 / SG 11261
- Variable input voltage
- Output range 21.6 29 V DC

SG 11264 Power Supply

- 24 V DC 3.8 A output
- Din Rail mounted

Features:

- Variable input voltage
- Output range 21.6 29 V DC

SG 11265 Power Supply

- 24 V DC 5 A output
- Din rail mounted

Features:

- Variable input voltage
- Output range 24 28 V DC


SG 11266 Power Supply


- 24 V DC 10 A output
- Din rail mounted

- Variable input voltage
- Output range 24 28 V DC









SG 11281 Cabinet

- 8 system cabinet

Features:

- Takes up to 8 smart product systems
- Steel construction
- Wall mounted
- Size 520 mm W x 510 mm L x 196.5 mm D
- Complete with 100 A mains power breaker

SG 11282 Cabinet

- 24 system cabinet

Features:

- Takes up to 24 smart product systems
- Steel construction
- Size 520 mm W x 890 mm L x 196.5 mm D
- Complete with 100 A mains power breaker

SG 11283 Cabinet

- 56 system cabinet


Features:

- Takes up to 56 smart product systems
- Steel construction
- Size 520 mm W x 1250 mm L x 196.5 mm D
- Complete with 100 A mains power breaker

D. MANUALS



COMBINATION CONTROLS AND SYSTEMS

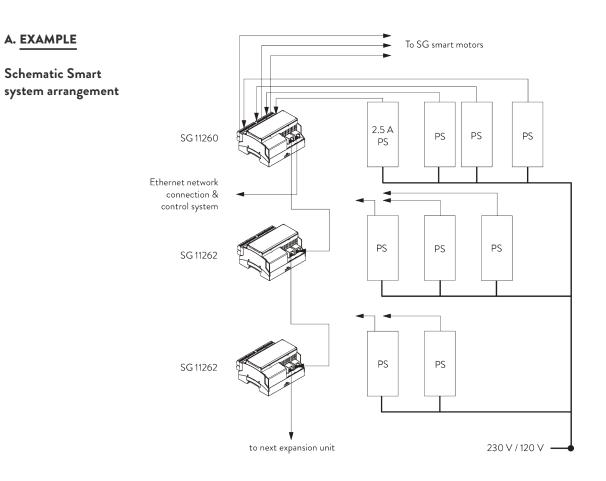

B. WIRING DIAGRAMS

4



PARTS

A. CONTROLS



SG 11250

SG 11251

Motor 24V DC, 50-Series 1.5/55



SG 11283 Cabinet for 56 systems



Smart plug 6-pin, MC 1.5/6 ST-3.81



SG 11252 Motor 24V DC, 50-Series 6/20

Motor 24V DC, 50-Series 3/32



SG 11255 Motor 24V DC, 50-Series 10/20



SG 11260 Gateway Cedia



SG 11261 Gateway KNX



SG 11262 Expansion unit



SG 11263 Power supply 24V DC, 2.5A DIN Rail

SG 11264 Power supply 24V DC, 3.8A DIN Rail

SG 11265 Power supply 24V DC, 5A DIN Rail



SG 11266

Power supply 24V DC, 10A DIN Rail



SG 11270 Smart module




SG 11281 Cabinet for 8 systems



SG 11282 Cabinet for 24 systems





The Architects of Silence

Silent Gliss is the leading global supplier of premium interior window treatments. Since 1952 we have been tirelessly committed to the development of the world's smoothest, quietest systems using state of the art technology.

Driven by customer needs, Silent Gliss offers functional and durable products. Expert technical advice coupled with installation and support services complete the offer. Silent Gliss stands for innovative, sustainable, tailor made solutions, exceptional design and first-class quality.

Silent Gliss Ltd.

Pyramid Business Park Poorhole Lane, Broadstairs Kent CT10 2PT United Kingdom **T** +44 1843 863571 **F** +44 1843 864503 info@silentgliss.co.uk

Silent Gliss Global Ltd.

Pyramid Business Park Poorhole Lane, Broadstairs Kent CT10 2PT United Kingdom **T** +44 1843 874250 **F** +44 1843 864503 info@silentglissglobal.com

Silent Gliss Blinds Trading LLC

Office 1906 The H Hotel Complex Trade Center First Dubai United Arab Emirates **T** +971 4 7050318 info@silentgliss.ae

silentgliss.co.uk silentglissglobal.com silentgliss.ae